


Coil Heaters

Type GCL

APPLICATIONS

Most suitable for heating barrels requiring higher temperatures than considered suitable for a mica type heater. The coil heater is rugged and can stand exposure to temperatures as high as 1000° F. The heater is configured from a straight length and can be custom designed to the application in diameter, heat pattern, and terminal direction. A low profile is an added benefit.

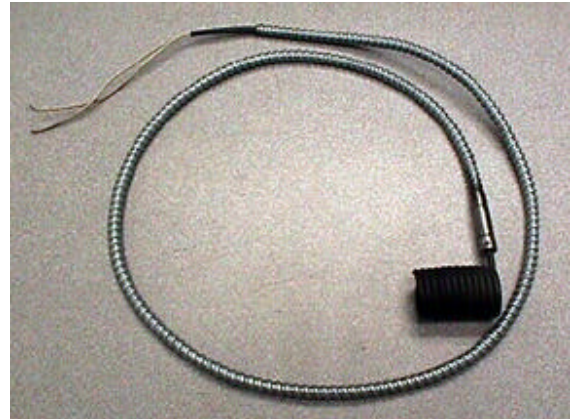

STANDARD FEATURES

The external sheath is constructed of stainless steel with a square cross-section. The resistance wire is enclosed in the sheath and is compacted with MgO powder similar to other Gaumer heating elements.

Coil Heaters

Type GCL

Catalog No.	Diam.	Width	Watts	Volts	w/sq.in.	Features
GCL50-014A	0.50	1.45	250	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL50-020C	0.50	2.00	250	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL50-045F	0.50	4.50	300	120	0	48 Inch Leadwires, Internally mounted Thermocouple
GCL50-045E	0.50	4.50	300	120	0	48 Inch Leadwires, Internally mounted Thermocouple
GCL50-045C	0.50	4.50	300	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL50-045D	0.50	4.50	300	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL50-025A	0.50	2.50	450	240	0	40 Inch Leadwires, Internally mounted Thermocouple
GCL50-025B	0.50	2.50	450	240	0	40 Inch Leadwires, Internally mounted Thermocouple
GCL62-009A	0.63	0.98	225	240	0	42 Inch Leadwires
GCL62-020A	0.63	2.00	300	240	0	36 Inch Leadwires, Internally mounted Thermocouple

Coil Heaters

Type GCL

Catalog No.	Diam.	Width	Watts	Volts	w/sq.in.	Features
GCL62-025A	0.63	2.50	350	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL62-030A	0.63	3.00	400	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL62-035A	0.63	3.50	425	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL62-040A	0.63	4.00	500	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL62-050A	0.63	5.00	500	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL62-060A	0.63	6.00	550	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL75-014A	0.75	1.44	250	240	0	36 Inch Leadwires
GCL75-019A	0.75	1.94	300	240	0	36 Inch Leadwires
GCL75-017A	0.75	1.75	315	240	0	45 Inch Leadwires, Internally mounted Thermocouple
GCL75-024B	0.75	2.44	315	240	0	45 Inch Leadwires, Internally mounted Thermocouple
GCL75-024A	0.75	2.44	350	240	0	36 Inch Leadwires
GCL75-029A	0.75	2.94	400	240	0	36 Inch Leadwires
GCL75-034A	0.75	3.44	425	240	0	36 Inch Leadwires
GCL75-044A	0.75	4.44	500	240	0	36 Inch Leadwires
GCL75-054A	0.75	5.44	500	240	0	36 Inch Leadwires
GCL87-021A	0.78	2.13	400	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL87-026A	0.78	2.63	450	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL87-031A	0.78	3.13	550	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL87-036A	0.78	3.63	700	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL87-041A	0.78	4.13	800	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL87-051A	0.78	5.13	900	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL87-061A	0.78	6.13	1000	240	0	36 Inch Leadwires, Internally mounted Thermocouple
GCL87-071A	0.78	7.13	1100	240	0	36 Inch Leadwires, Internally mounted Thermocouple