

Mercury Contactors


Type G - 1, 2, or 3 pole

APPLICATIONS

Performs switching on and off of electric heater loads when used with any electronic temperature controller with relay output. Five million (5,000,000) operations without failure is common when used on a resistance load and one hundred thousand (100,000) operations may be expected with a tungsten load.

STANDARD FEATURES

Silent operation, totally encapsulated, moisture resistant, hermetically sealed, U.L. Listing File #E62767

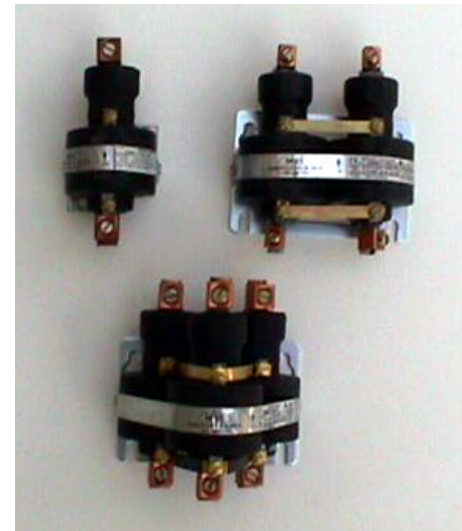

Gaumer Catalog Number	Qty. of Poles	Coil VAC	Res. Rating (Amps)	Height (Inches)	Depth (Inches)	Width (Inches)	Weight (lbs.)
G35NO-120A	1	120	35	4-1/4	2-1/4	1-7/8	1
G60NO-120A	1	120	60	4-1/4	2-1/4	1-7/8	1
G100NO-120A	1	120	80	5	2-5/8	2-1/2	2
G235NO-120A	2	120	35	4-1/4	2-1/4	3-3/4	2
G260NO-120A	2	120	60	4-1/4	2-1/4	3-3/4	2
G2100NO-120A	2	120	80	5	2-5/8	5-3/4	3
G335NO-120A	3	120	35	4-1/4	3-5/8	3-3/4	2
G360NO-120A	3	120	60	4-1/4	3-5/8	3-3/4	3
G3100NO-120A	3	120	80	5	4-7/8	5-3/4	4
G20NO-120A	1	120	20	4-1/4	2-1/4	1-7/8	1
G220NO-120A	2	120	20	4-1/4	2-1/4	3-3/4	1
G325NO-120A	3	120	20	4-1/4	3-5/8	3-3/4	2
G35NO-24AC	1	24	35	4-1/4	2-1/4	1-7/8	1
G35NO-240A	1	240	35	4-1/4	2-1/4	1-7/8	1
G235NO-220A	2	220	35	4-1/4	2-1/4	3-3/4	2
G335NO-240A	3	240	35	4-1/4	3-5/8	3-3/4	3
G235NO-480A	2	480	35	4-1/4	2-1/4	3-3/4	2
G60NO-240A	1	240	60	4-1/4	2-1/4	1-7/8	1
G260NO-240A	2	240	60	4-1/4	2-1/4	3-3/4	2
G360NO-240A	3	240	60	4-1/4	3-5/8	3-3/4	3