

GB300

End Seal / In-line Splice Connection



Product Description

The GB300 is an above insulation end seal kit for use with Gaumer GHT-CR, GHT-CT, GHU-CT and GHK-CT self-regulating heating cables, to be used either as an end seal for up to two heating cables or as an in-line splice connection.

The GB series utilizes pipe stand for on-pipe installation to allow heating cables to directly enter the enclosure without the use of insulation while protecting the cables from exposure. For heating cable terminations, GB series connection kits use silicone rubber end caps or core sealers and RTV adhesive without the need for heatgun for installation.

For in-line splice connections, the separate "GB-SK" accessory pack is required and sold separately.

Ordering Information

GB300

GB = Connection kit series
300 = Application;
100 = Power connection and more
200 = Tee or Splice connection, End termination
300 = End seal, In-line splice connection



Specifications

	GB300
Application	End Seal / In-line Splice Connection
Heating cable capability (No. of heating cable entry)	GHT-CR, GHT-CT, GHU-CT, GHK-CT (Up to two heating cables)
Supply voltage	100 ~ 277V
Ingress protection	NEMA Type 4X, IP66
Ambient temperature range	-40°F ~ 131°F (-40°C ~ 55°C)
Minimum installation temperature	-40°F (-40°C)

Gaumer Process

Address 13616 Hempstead Road · Houston, TX, U.S.A., 77040

Web www.gaumer.com Tel +1 (800) 460 5200 E-mail sales@gaumer.com



1/2

Certification / Approvals



FM24US0113X, FM24CA0042X

Hazardous (classified) locations
Indoors and outdoors

Class I, Division 2, Groups A, B, C and D T*
Class II/III, Division 2, Groups E, F and G T*

Class I, Zone 1, AEx/Ex eb IIC T* Gb;
Zone 21, AEx/Ex tb IIIC T* °C Db;

Ta = -40°C to +55°C

NEMA Type 4X, IP66



FM24ATEX0018X

Ex II 2 G Ex eb IIC T* Gb;

Ex II 2 D Ex tb IIIC T* °C Db;

Ta = -40°C to +55°C

IP66



IECEx FMG 24.0017X

Ex eb IIC T* Gb;

Ex tb IIIC T* °C Db


Ta = -40°C to +55°C

IP66


**For T-rating, please refer to cable documentation.*

Dimensions

TOP



FRONT

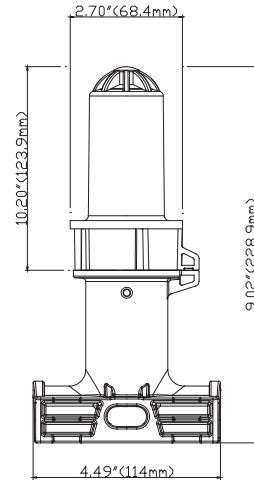

Material information

Contents	<ul style="list-style-type: none"> 1 End cap 1 Pipe stand and O-ring 3 Grommets(S, M, L) for different cable sizes 2 Rubber end caps 1 RTV sealant 1 Wrench 1 Cable tie
Required for splice connection (Sold separately)	GB-SK, consists of: <ul style="list-style-type: none"> 2 Core sealers (S) 2 Insulation tubes Y/G (S) 3 Closed end connectors 1 RTV sealant
Enclosure material	Glass reinforced polymer end cap Glass reinforced polymer pipe stand
Installation accessories (Sold separately)	Pipe Straps Fiberglass tape Aluminum tape
Tools required	Wire cutters, Utility knife, Marking pen Large slotted screwdriver Adjustable pliers, Needle nose pliers Molex RHT-7000 crimp tool or equivalent; 10-16AWG slot (For in-line splice connection only)

[NOTE] Please refer to GB Kit Installation Instructions for full and current material details.

Technical information subject to change without notification.

Gaumer Process

Address 13616 Hempstead Road · Houston, TX, U.S.A., 77040

Web www.gaumer.com Tel +1 (800) 460 5200 E-mail sales@gaumer.com



2/2

© Gaumer Process All rights reserved.